

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
18 September 2003 (18.09.2003)

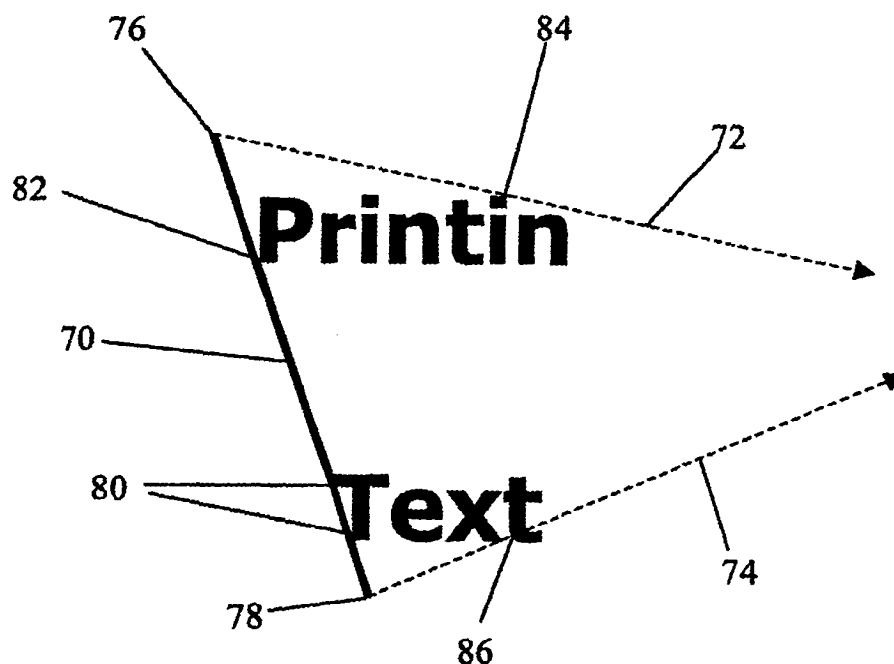
PCT

(10) International Publication Number
WO 03/076198 A1

- (51) International Patent Classification⁷: **B41J 3/36**, 3/28, G06K 11/08, 11/18
- (74) Agents: **ZACCO SWEDEN AB** et al.; P.O. Box 23101, Sveavägen 170, S-104 35 Stockholm (SE).
- (21) International Application Number: **PCT/SE03/00391**
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 10 March 2003 (10.03.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0200709-4 11 March 2002 (11.03.2002) SE
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): **PRINT DREAMS EUROPE AB** [SE/SE]; Norgegatan 1, S-164 32 Kista (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **WALLING, Alex, M.** [SE/SE]; Lindevägen 128, S-120 48 Enskede Gård (SE).
- Published:
— with international search report

[Continued on next page]

(54) Title: HAND HELD PRINTING OF TEXT AND IMAGES FOR PREVENTING SCEW AND CUTTING OF PRINTED IMAGES



(57) Abstract: The invention relates to a sensor and (2) assembly comprised in a housing (1) for a hand-held and hand-operated printing device controlled by a processor (4), and a method therefore. It provides that the assembly comprises an arrangement and a method for preventing skew and cutting of printed images.

BEST AVAILABLE COPY

WO 03/076198 A1

03/076198 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Printing of text and images

Technical field

The present invention pertains to a sensor means and a print-head assembly for a
5 hand-held and hand-operated printing on a print medium controlled by a processor, and a
method therefore, so called Random Movement Printing Technology (RMPT). Specifically it
provides an arrangement and a method to prevent cutting of printed text or other images in
consecutive printing bands/lines.

Background art

10 Hand-held and hand-operated printing devices with an ink-jet print-head are
known through various documents.

US patent No. 5,927,872 to Yamada discloses a system and a method of printing
an image represented by a frame of image data utilizing a hand-held printer having optical
sensor means for tracking positions of the hand-held printer relative to the surface of a print
15 medium during a printing process. It is monitored in real time using navigation information
generated by the optical sensor.

Each optical sensor comprises an array of opto-electronic elements to capture
images of the surface of a print medium at fixed time intervals. Preferably, the optical sensor
means can detect slight pattern variations on the print medium, such as paper fibers or
20 illumination pattern formed by highly reflective surface features and shadowed areas between
raised surface features. These features can then be used as references for determining the
position and the relative movement of the hand-held printer. During the printing process, the
printed portions of the image can also be used as reference positions by the hand-held printer.

In the preferred embodiment, the hand-held printer contains a navigation
25 processor and a printer driver. Using the printer driver, the navigation processor drives the
hand-held printer to print segments of the image onto a print medium as the hand-held printer
travels across the print medium during a printing process. Each segment of the image is
printed onto a particular location on the print medium to form a composite of the image.

In the US patent No. 6,233,368 B1 to Badyal et al it is taught a CMOS digital
30 integrated circuit (IC) chip on which an image is captured, digitized, and then processed on-
chip in substantially the digital domain.

A preferred embodiment comprises imaging circuitry including a photo cell
array for capturing an image and generating a representative analog signal, conversion
circuitry including an n-bit successive approximation register (SAR) analog-to-digital

converter for converting the analog signal to a corresponding digital signal, filter circuitry including a spatial filter for edge and contrast enhancement of the corresponding image, compression circuitry for reducing the digital signal storage needs, correlation circuitry for processing the digital signal to generate a result surface on which a minima resides
5 representing a best fit image displacement between the captured image and previous images, interpolation circuitry for mapping the result surface into x- and y-coordinates, and an interface with a device using the chip, such as a hand-held scanner.

The filter circuitry, the compression circuitry, the correlation circuitry and the interpolation circuitry are all embodied in an on-chip digital signal processor (DSP). The DSP
10 embodiment allows precise algorithmic processing of the digitized signal with almost infinite hold time, depending on storage capability. The corresponding mathematical computations are thus no longer subject to the vagaries of CMOS chip structure processing analog signals. Parameters may also be programmed into the DSP's software making the chip tunable, as well as flexible and adaptable for different applications.

15 US patent No. 5,644,139 to Allen et al discloses a scanning device and a method for forming a scanned electronic image including the use of navigation information that is acquired along with image data, and then rectifying the image data based upon the navigation and image information. The navigation information is obtained in frames. The differences between consecutive frames are detected and accumulated, and this accumulated displacement
20 value is representative of a position of the scanning device relative to a reference. The image data is then positioned-tagged using the position data obtained from the accumulated displacement value. To avoid the accumulation of errors, the accumulated displacement value obtained from consecutive frames is updated by comparing a current frame with a much earlier frame stored in memory and using the resulting difference as the displacement from
25 the earlier frame. These larger displacement steps are then accumulated to determine the relative position of the scanning device.

The above documents teach how to determine the position in a conceptual generation of navigation information. In this context the US patent 5,927,872 to Yamada uses the navigation information for a hand-held scanner disclosed in US patent 5,644,139 to Allen
30 et al. The invention according to Allen et al teaches navigation through comparison of pixels on a frame basis.

When printing lines/rows of text or images with, for example, a hand held printer of a type described through the Swedish patent application 0102542-8 by Walling, not yet published but described below, there are problems related to skew between successive

lines/rows, when the print-head is moved back and forth from the right to the left downwards on a print medium such as a piece of paper. The printing operation builds up an image of horizontal bands in lines where a lower band is an extension of an upper band. Hereby, sensor means for positioning sensing of the print-head are providing the printer with information so that positions and an angle of rotation can be determined on the print medium used. This must be accomplished very accurate in order to avoid skewing and/or clipping of, for example, printed characters.

Hence, if the absolute position and/or angle of rotation do not correspond with the values input to the printer, due to, i.a., the system resolution, the bands of text would not fit to each other. Obvious consequences of band skew are clipping/cutting of characters to be printed, depicted as a part of, for example, a character being printed in an upper band and the remaining part in a lower band in sweeps with the printer, and the character or word printed becomes hard to interpret, i.e., readability is distorted.

Regarding the resolution of a positioning sensor, currently used sensors have been shown to transfer mal positioning within 0.5-1.0%. In order to avoid distortion, current sensor resolution has to be improved with a factor 10.

Summary of the disclosed invention

The present invention relates to a new print-head assembly for a hand-held and hand-operated printing on a print medium controlled by a processor. To solve problems mentioned in the latter part of the background description, the assembly is provided an arrangement and a method for preventing skew and cutting of printed text or other images.

Hence, the present invention sets forth a sensor and print-head assembly comprised in a housing for a hand-held and hand-operated printing device controlled by a processor, comprising at least one sensor means, a print-head array, input means on said housing connected to said processor for input of assembly control commands, and means for keeping track of the assemblies and print-heads position on a print medium. It thus, for a print out sweep with said array, comprises:

means for determining the x and y coordinates for at least one distal end of at least one row of printing means in said print head array, and the angle of rotation of said row with reference to a base line, made up of coordinates for the long side of an image stored to be printed, whereby every dot of a part of an image to be printed having determinable corresponding x and y coordinates related to a determined position for said row;

means for determining an x and y coordinate for a first tangent of said row with the first part of said image to be printed, and at least one second tangent for said image in relation to a mathematically defined configuration relating to the rotation angle of the row and said distal end, said second tangent making up a boundary for when a print out of said part
5 image should take place;

means for determining if said row during movement is closing in to said second tangent from the clockwise or counter clockwise direction; and

means for providing a print out decision for a subsequent part image to be printed through said print-head in front of a print out, if the row is closing in clockwise to the
10 second tangent when using the upper distal end of the row as reference for the second tangent (84), and the vice versa when using the lower distal end as reference for a sweep.

In one embodiment of the present invention, the print-head is of the ink-jet type with spray nozzles making up said row. A further embodiment comprises that the first and last nozzle in said row are references for said distal ends.

15 A still further embodiment provides that the mathematical configuration has one origin on at least one of the distal ends of said row. Another embodiment provides that the configuration is used for clockwise rotation and/or counter clockwise rotational print out feeding through said row.

A yet further embodiment comprises that said mathematical configuration is a
20 line suitable for forward feeding with less rotation of said array. In another embodiment said mathematical configuration is a curve suitable for rotation feeding of said array.

Yet another embodiment provides a frame that is related to each part image to be printed, thus defining every part image through at most four tangent coordinates for said first and said second tangent. In a further embodiment coordinates for a frame are stored in a
25 table sorted in accordance with corresponding part images to be printed. In one embodiment said frame is longer then the actual part image to be printed, whereby a next image to be printed is pre-checked according to its alignment for printing.

Yet one further embodiment provides that said array row is approximated with at least one half of a rectangle, thus facilitating the finding of a tangent for said row for a part
30 image to be printed.

The present invention also presents a method for a sensor and print-head assembly comprised in a housing for a handheld and hand operated printing device controlled by a processor, comprising at least one sensor means for keeping track of the assemblies and

print-heads position on a print medium and a print-head array. The method thus comprises, during a print out sweep with said array, the steps of:

- determining the position of the array at each moment;
- predicting the positions of the array for subsequent moments in order to
- 5 - determine whether a text block or an image is about to be printed during said subsequent moments and if so
- deciding whether the complete text block or image, or a predefined part of the text block or the image will be covered by said array during said print out sweep, based on said predictions, and if not,
- 10 - omitting a print out of said text block or image, or said part of the text block or image during said print out sweep, otherwise
- printing out said text block or image during said print out sweep.

Moreover the present invention presents a method for a sensor and print-head assembly comprised in a housing for a hand-held and hand-operated printing device
15 controlled by a processor. It comprises at least one sensor means, a print-head array, input means on said housing connected to said processor for input of assembly control commands, and means for keeping track of the assemblies and print-heads position on a print medium.

During a print out sweep with said array, it performs the steps of:

determining the x and y coordinates for at least one distal end of at least one row
20 of printing means in said print head array, and the angle of rotation of said row with reference to a base line, made up of coordinates for the long side of an image stored to be printed, whereby every dot of a part of an image to be printed having determinable corresponding x and y coordinates related to a determined position for said row;

determining an x and y coordinate for a first tangent of said row with the first
25 part of said image to be printed, and at least one second tangent for said image in relation to a mathematically defined configuration relating to the rotation angle of the row and said distal end, said second tangent making up a boundary for when a print out of said part image should take place;

determining if said row during movement is closing in to said second tangent
30 from the clockwise or counter clockwise direction; and

said print-head accomplishing a print out of said part of an image as long as the row is closing in clockwise to the second tangent when using the upper distal end of the row

as reference for the second tangent, and the vice versa when using the lower distal end as reference for a sweep.

It is appreciated that the methods of the present invention is able to perform steps addressed through the above assembly embodiments, as addressed through the attached set of method sub claims.

Brief description of the drawings

Henceforth reference is had to the accompanying drawings for a better understanding of the given examples and embodiments of the present invention, wherein:

Fig. 1 illustrates a perspective view in section of a printing device that may be used in the present invention;

Fig. 2 illustrates a perspective view from underneath of a printing device according to Fig. 1;

Fig. 3 illustrates a schematic view of the main components of a printing device according to Fig. 1 and 2;

Fig. 4 illustrates a perspective view of another embodiment for a printing device that may be used in the present invention;

Fig. 5 illustrates a perspective view of a simpler printing device that may be used in the present invention;

Fig. 6 schematically illustrates a sensor/print-head assembly that may be used in the present invention;

Fig. 7 illustrates a diagram with parameters used to determine the position of a sensor that may be used in the present invention;

Fig. 8 illustrates a diagram with parameters for a print-head nozzle position;

Fig. 9 illustrates an image to be print out;

Fig. 10 illustrates a part random print out of the image with a printer of, for example, Fig. 1;

Fig. 11 illustrates a row in a print-head array in accordance with one embodiment of the present invention;

Fig. 12 illustrates images that are framed in accordance with one embodiment of the present invention;

Fig. 13 illustrates a row in a print-head array, being allocated half's of rectangles in accordance with one embodiment of the present invention; and

Fig. 14 illustrates a row in a print-head array, being allocated one half of a rectangle in accordance with one specific embodiment of the present invention.

Detailed description of preferred embodiments

As mentioned in the foregoing, the present invention relates to a new print-head assembly for a hand-held and hand-operated printing on a print medium controlled by a processor. To solve problems relating to skew and/or clipping of images during consecutive
5 sweeps with a RMPT printer, the assembly is provided an arrangement and a method for preventing skew and cutting of printed text.

A detailed description of the arrangement and method in accordance with the present invention is provided with reference to Fig. 11 to Fig. 14 below.

Fig. 1 to Fig. 10 disclose or relate to a hand-held printer device as described in
10 the Swedish patent application 0102542-8 by Walling, not yet published, which substitutes both the mechanical control of a print-head and forward feeding of a print-out through hand movements on a printing surface. This enables a manufacturing of a printer device, having less width than the actual print-out, and a reduction of the total of mechanical components in its construction.

15 It is designed to provide a compact portable printing device in order to enable a user to print from small portable devices such as a cellular phone, a portable PC, a personal digital assistance (PDA) or the like, and other portable electronic devices or for electronic stamping, printing of small texts, tags, addresses, cutting and clipping.

By fixing a print-head in a construction plate where one or more positioning
20 sensor means are fixed as well, it is possible to obtain a geometrical construction with an x- and y- coordinate system and to establish, with great mathematical accuracy, the coordinates x and y for each individual ink-jet opening/nozzle in the print-head.

The coordinates, during a time frame, constitute the grounds for an accurate and precise spraying of ink-drops onto a printing surface according to a predetermined printing
25 design. Even when the coordinates change over a time period, it is possible to calculate in real time, the changes in direction, speed, acceleration, rotation etc. along the z-axis controlled by a microprocessor. It provides the possibility to adjust the printing-head to spray an even and pre-programmed flow of ink-jet drops into an adjustable and varying flow of ink-jet drops.

Fig 1 and 2 illustrate a hand operated printing device composed by a
30 construction/design body 1 and a print-head 2 which interact with one or more optical positioning sensor means 3, a micro controller circuit 4, a communication unit 5 to transmit the data, one or more command buttons 6 a control screen, and a source of energy, in this case a battery 8.

The embodiment according to Fig.1 and 2 illustrate the different components of a printing device fixed to a printed circuit card which simultaneously functions as a construction surface where those components are fixed. An elevation in the construction secures that the lowest surface of the printing device does not touch the area where the ink has been previously applied provided that the printing device is removed from that area.

The printing process starts with a data file containing pre-selected printing patterns, which are sent via the communication unit 5 to a data memory, for example, one which is built into the micro controller circuit 4. With the assistance of a built-in positioning sensor means 13 and one of the command buttons 6 the coordinates are indicated to an outgoing point of reference in the printing surface. One or more sources of light, for example light emitting diodes (LED), lighting up the printing frame so that the optical positioning sensor means are activated and then the forward feeding of the coordinates to the micro controller circuit can take place.

When the positioning sensor means 3 and the print-head 2 are fixed in relation to each other, a geometrical construction with all the necessary parameters for a mathematical calculation of the coordinates of the print-head 2 can be achieved.

The micro controller circuit 4 contains a software program, which uses the incoming data from the positioning sensor means 3 and mathematical equations to calculate in real time the coordinates for each individual ink-jet nozzle 12.

Using the measures of two coordinates establishes the required movement direction for each case. The time difference between two measurements indicates the acceleration and speed required. Simultaneously all measurements and equations are compared with the stored printing commands based upon coordinates equated from the original data file.

At this stage the micro controller circuit has sufficient information to seize a decision. On a positive indication an electric impulse is generated in the piezo- or thermo-electrical micro pumps in the concerned ink-jet nozzles 12, which in turn sends out ink-jet drops onto the printing surface.

The printing commands are erased after each electric impulse so that even if the ink-jet nozzles coincide with the previous coordinates no ink drops are sent out to the existing print out.

Fig. 3 illustrates how the different components of the printing device interact as well as reproduction of the geometrical forms established between the ink-jet nozzles 12 and the positioning sensor means 3.

The embodiment according to Fig. 4 illustrates the printing device with a complementary digital camera 14, for example, such as a CCD equipped camera.

The print-head 2 can be pre-programmed to send out, with even intervals small groups of separated microscopic ink-jet drops pairs, which do not belong to the actual printing pattern but which can build a recognizable pattern for the camera 14. The camera registers these dots and transmits the information onto the micro controller circuit 4 which uses the information as a reference for ongoing revision of the position of the printing device and in that way reduce the effect of the margin of error built-in the positioning sensor means 3. This embodiment is especially effective when printing on bigger surfaces as well as when the resolution and quality demands are high.

These groups of microscopic ink-drops are essentially invisible for the human eye and they do not affect the printing result in any noticeable way.

Fig. 5 illustrates another embodiment for printing of smaller text quantities or graphics.

This can be considered as an electronic labeling with a pre-programmed and/or programmable electronic stamp pad.

In this embodiment only one positioning sensor means 3 is used and accordingly a simpler micro controller circuit 4 is needed, since the printing device only makes smaller and relatively straight movements.

The sensor/print-head device consists of two position sensor means S0, S1 and a print head array 60 mounted together as Fig. 6 illustrates. Fig. 6 illustrates further, the two sensor means S0 and S1 in a fixed relation to a print-head array 60 with ink-jet nozzles. H_0 depicts the distance from the array 60 to the sensor means S0, here H_0 constitutes the same distance to the sensor means S1. V_e and V_o , indicate the distance to the upper most and the lower nozzle in the array 60, respectively. The sensor means S0, S1 provide a signal corresponding to movements in x- and y-directions in a first coordinate system fixed to the respective sensor means S0, S1. The sensor means S0, S1 are fixed so that their coordinate systems are parallel to each other. A software keeps track of the assembly's position and angle relative to the paper coordinate system by integrating the movements given by the sensor means signals.

The new positions given the differential movements of sensor means S0, S1 are calculated as follows.

All position changes given in the sensor means coordinate system must be transformed to position and angle of the sensor system in a paper or other print medium

coordinate system, here named as a second coordinate system. Since the distance, $2H_o$, between the two sensor means is fixed it is satisfactory to know the position of one sensor means and the angle of the print head array relative to the second coordinate system.

Illustrated in Fig. 7, is a movement or navigation of the sensor print-head assembly according to Fig. 6. The array 60 has been moved or navigated an angle α . The upper most nozzle is depicted as Pn_{last} and the lower nozzle as Pn_{first} , respectively, in Fig. 7. Also, the second coordinate system is depicted with the two longer arrow axis in Fig. 7.

In Fig. 7 at least one of the sensor means is assigned a first coordinate system, whereby one axis 62, preferably the x-axis, is directed through both sensor means S_0 , S_1 , and the other axis, preferably in a relation to the array 60, here in parallel to the array.

In Fig. 8, the same movement as in Fig. 7 is depicted, but without the array 60. The Fig. 8 further depicts a first coordinate system on the coordinate axis 60 directed through both sensor means S_0 , S_1 . The first coordinate system, is in this embodiment duplicated, as indicated through the arrows on the axis 62, but as the distance between both sensor means S_0 , S_1 is fixed only one of the first coordinate systems is needed for computation.

The movement of the sensor means S_0 or S_1 (it does not matter which one) in the paper or print medium second coordinate system at an angle ' α ' is calculated, as:

$$\Delta X = S_0\text{Diff}X * \cos(\alpha) - S_0\text{Diff}Y * \sin(\alpha)$$

$$\Delta Y = S_0\text{Diff}X * \sin(\alpha) + S_0\text{Diff}Y * \cos(\alpha)$$

Where $S_0\text{Diff}X$ and $S_0\text{Diff}Y$ are the movements of the sensor means in x- and y-directions respectively, in the sensor/print-head device, named first coordinate system.

The angular change can be calculated as the difference of the sensor means y-movements in the sensor means first coordinate system multiplied by a constant that is determined from the distance between the sensor means S_0 , S_1 . To simplify, the angle is measured in units of one sensor "step" and the sine and cosine values are taken from tables that are adjusted according to this. Thus $S_1\text{Diff}Y - S_0\text{Diff}Y$, provides the angle change.

The movement in x-direction of sensor means S_1 is not used, the information is redundant since the sensor means geometry is fixed.

When the position of one sensor means S_0 or S_1 and the tilt angle of the sensor/print head assembly α are known the positions of the print head nozzles can be calculated as follows, depicted in Fig. 7:

The positions of the first and last nozzle are calculated as:

$$PN_{first}X = S_0x + H_o * \cosine(\alpha) - V_o * \sin(\alpha)$$

$$PN_{firstY} = S0y + Ho * \sin(\alpha) + Vo * \cos(\alpha)$$

$$PN_{lastX} = S0x + Ho * \cos(\alpha) - Ve * \sin(\alpha)$$

$$PN_{lastY} = S0y + Ho * \sin(\alpha) + Ve * \cos(\alpha)$$

To calculate the positions of all nozzles, it is to start with the first nozzle
5 positions and adding up the difference in x- and y-directions between the nozzles, calculated
by dividing the x- and y-distance between the first and last nozzle by the number of nozzles:

$$PN(n)X = PN_{firstX} + n * \Delta X$$

$$PN(n)Y = PN_{last} + n * \Delta Y$$

where

$$10 \quad \Delta X = PN_{lastX} - PN_{firstY}$$

$$\Delta Y = PN_{lastY} - Pn_{firstY}$$

In accordance with the teaching it sets forth a sensor and ink-jet print-head 2
assembly comprised in a housing 1 for a hand-held and hand-operated printing device
controlled by a processor 4. It thus comprises:

15 two position sensor means S0, S1 at least one sensor means being related to a
first coordinate system, having one axis in a relation to the print-head assembly, and one axis
62 in a direction through both sensor means;

a print-head array 60 attached in a fixed position to the sensor means S0, S1;

input means 6 on the housing connected to the processor for input of control
20 commands;

determining means for reference coordinates in a second coordinate system
provided in relation to a print medium, the reference coordinates being established by a
control command through the input means 6 with the thus read sensor means signals;

integrating means for keeping track of the assemblies position related to the
25 reference coordinates in the second coordinate system by integrating displacement of the
sensor means position in the first coordinate system;
computing means for transforming the sensor means S0, S1 coordinates to coordinates in the
second coordinate system, whereby the assemblies position on the print medium is determined
in relation to the reference coordinates.

30 Sensor means and print-heads that are suitable to use are well known in the art
and described in for example US patent 5,927,872 to Yamada, US patent 6,233,368 B1 to

Badyal et al, and US patent 5,644,139 to Allen et al. Sensor means can be bought from Agilent, www.agilent.com. Another sensor means has the product name HDNS-2000 and enables 1.500 pitures/s, the next model in progress enables 6.000 pictures/s. Sensor means in this description can comprise known means that are to cooperate together with a sensor itself, for example, LEDs or only be sensors or an array of sensors.

Fig. 9 illustrates an image to be print out with the assembly, thus stored in the assembly's memory, and Fig. 10 depicts a part print out in a random movement.

Now with reference to Fig. 11, when printing lines/rows of text or images with, for example, a hand held printer of the type described in the foregoing, there are problems related to skew between successive lines/rows, when the print-head is moved back and forth from the right to the left downwards on a print medium such as a piece of paper. The printing operation builds up an image of horizontal bands in lines where a lower band is an extension of an upper band, one band can comprise multiple lines of text, see Fig. 11, having two lines, one comprising the text "Printin" and one "text". Hereby, sensor means for positioning sensing of the print-head are providing the printer with information so that positions and an angle of rotation can be determined on the print medium used. This must be accomplished very accurate in order to avoid skewing and/or clipping of, for example, printed characters.

Hence, if the absolute position and/or angle of rotation do not correspond with the values input to the printer, due to, i.a., the system resolution, the bands of text would not fit to each other. Obvious consequences of band skew are clipping/cutting of characters to be printed, depicted as a part of, for example, a character being printed in an upper band and the remaining part in a lower band in sweeps with the printer, and the character or word printed becomes hard to interpret, i.e., readability is distorted.

Regarding the resolution of a positioning sensor, currently used sensors have been shown to transfer mal positioning within 0.5-1.0%. In order to avoid distortion, current sensor resolution has to be improved with a factor 10.

Fig. 11 illustrates a row 70 in a print-head array in accordance with one embodiment of the present invention. A user of the print-head assembly of the present invention is of course aware of to a certain degree, or indicated, how much the assembly is tilted in relation to a base line. But nevertheless the user can slip or prefer to rotate the assembly instead of sweeping forward in smooth continuous steps.

The RMPT printer relies on that the print-head is firmly attached in the assembly, and a printing operation or a print out is accomplished so that a user moves the

printer on the print medium, successively building up the image to be printed. There are three degrees of freedom when moving the printer:

1. x-axis wise (right/left)
2. y-axis wise (up/down)
3. rotating

5 The angle of the printer array row 70 is 0° when its printing line (here the same as row 70) is parallel with the long side (base line) of an image to be printed, stored in a memory of the assembly. For the embodiments described herein an ink-jet print-head, having spray nozzles is provided, but other print-heads are possible to use when implementing the present invention. More specifically, the print-head array is comprised of a row 70 of 128
10 nozzles, and uses sensors in accordance with the foregoing description.

The sensors S0, S1 presently used provide pulse trains as output signals, where each pulse reassembles a movement of the row 70 of approximately $1/400$ inch. In one embodiment of the invention the assembly print-head prints out images of the bmp (bitmap) type, and the images are comprised of pure text, graphics, or a combination of both. But other
15 versions of the assembly are likely to provide serial interfaces where a bulk of text arrives as characters to the printer.

The inkjet nozzle row 70 with distal ends 76 and 78 in Fig. 11 is depicted with two dotted arrow lines 72 and 74, indicating a tangent 84 through line 72 on an image
20 "Printin" to be printed. Contrary to line 72, line 74 indicates an unwanted situation, where an image "Text" will be cut or clipped at point 86 if a print out is decided to occur, if the printer with row 70 is moved in a direction coinciding with the normal of row 70, a rotation clockwise would cut or clip the image "Print", and a counter wise rotation the image "Text".

To solve the problem of clipping and cutting images due to skew or tilting of the row 70, the present invention provides, during a print out sweep with the array/row 70, means
25 for determining the x and y coordinates for at least one distal end 76, 78 of at least one row 70 of printing means in the print head array. Further determining the angle of rotation of the row 70 with reference to a base line or long side of an image, stored, to be printed. Every dot, pixel, of a part of an image ("Printin", "Text") to be printed does have a determinable
30 corresponding x and y coordinate related to a determined position for the row 70, as for example described above.

Furthermore the present invention provides means for determining an x and y coordinate for a first tangent 80, 82 of the row 70 with the first part ("P" and "T" in Fig. 11)

of the image to be printed, and a second tangent 84 for the image in relation to a mathematically defined configuration (the line 72 or 74 in Fig. 11) relating to the rotation angle of the row 70 and the distal end 76, whereby the print-head accomplishes a print out of the part ("Printin") of an image as long as the prolongation, following the arrow of line 72, of the second tangent 84 bypasses the part of an image during a sweep. A sweep of the assembly should be read as a continuous forward movement or rotation.

To be able to a correct decision for a print out of a part image, the present invention is able to determine if the row 70 during movement is closing in to the second tangent 84 from the clockwise or counter clockwise direction. The print-head 60 is according to this accomplishing a print out of the part of an image as long as the row 70 is closing in clockwise to the second tangent 84 when using the upper distal end 76 of the row 70 as reference for the second tangent 84, and the vice versa when using the lower distal end 78 as reference for a sweep.

One possible embodiment of the present invention may incorporate that both distal ends 76, 78 are used through a mathematical configuration 72, 74, which would provide that a print out would occur as long both clockwise and the counter clockwise directions are closing in to a second tangent 84 not crossing an image to be printed.

A decision of whether a part of an image should be printed has to be taken on line exactly before the image may be printed. Hence, the present invention sets forth means for providing a print out decision for a subsequent part image to be printed through the print-head 60 in front of a print out, if the row 70 is closing in clockwise to the second tangent 84 when using the upper distal end 76 of the row 70 as reference for the second tangent 84, and the vice versa when using the lower distal end 78 as reference for a sweep. In order to describe how to find a direction to move the printer assembly for a successful print out a less mathematical description follows:

- If some part of a first character (P) in a word lies close to 82 the print line or row 70, and if the direction is less downwards than a fictive line 72 commencing from the upper part 76 of the print-head array row 70 rotated clockwise until a part 84 of the line touches the word to be printed, then print out.

During a movement to the left in Fig. 11, the problem becomes inverted. The above prevails under the condition that a movement is not changed during the time a word

is printed. It is also possible to take curved movements into consideration instead of the line 72, 74 solution above.

In order to provide that the assembly of the present invention can operate as described, a great deal of “heavy” calculations have to be performed, for example, trigonometric calculations. Hence, the present invention presents a simpler solution to the addressed problem, but still within the scope of the invention as defined in the attached main claims.

Instead of checking how every part image to be printed is build up, the present invention suggests to put a frame 90 around each part image, as depicted in Fig. 12, which illustrates images that are framed in accordance with one embodiment of the present invention. Part images to be printed in accordance with Fig. 12 are the following “Example”, “of”, “text”, “to”, and “print”. It is appreciated that various other framings are possible for a person skilled in the art. Those in Fig. 12 are to be regarded as possible examples.

By determining the coordinates for the corners of the frames and store them in a look up table in an electronic memory, preferably arranged or sorted to consecutively correspond with the part images to be print out, the print out calculations are heavily reduced.

Fig. 13 illustrates another embodiment of simplifying calculations, where a row 70 in a print-head array, being allocated half's of rectangles 100 in accordance with one embodiment of the present invention. Hereby, the printer line or row 70 is approximated with a plurality of vertical lines 102 closed with horizontal lines 104 each “stair” making up a half of a rectangle 100 in shape. This approach simplifies the finding of a location where a part of an image tangents the row 70. The vertical lines 102 are in parallel (base line) with the image coordinates stored in the bitmap for the image in question.

Fig. 14 illustrates a row 70 in a print-head array, being allocated just one half of a rectangle in accordance with one specific simplified embodiment of the present invention. This represents an extreme case of a “stair” approximation, with just one vertical line 102 and framed images to be printed.

A less mathematical explanation of how the “stair” solution is operated is now provided:

- If the print line or row 70 lower distal ends x coordinate is the same as for the frame left side x coordinate, and if the direction of the fictive line 72 originating from the

upper distal end 76 is less downwards pointing then the upper right corner of the frame, then allow a print out.

5 Regarding frames in the context of the present invention they could preferably in one embodiment of the invention be made a predetermined length longer then a part image itself to be printed, thus providing a pre check of the alignment of the next part image to be printed.

It is appreciated that some of the means used in the present invention are hardware means or software means or a combination of both.

10 The present invention is not restricted to given embodiments or examples, but the attached set of claims define other embodiments for a person skilled in the art.

Claims

1. A sensor and print-head (2) assembly comprised in a housing (1) for a hand-held and hand-operated printing device controlled by a processor (4), comprising at least one sensor means (S0, S1), a print-head array (60), input means (6) on said housing (1) connected to said processor (4) for input of assembly control commands, and means for keeping track of the assemblies and print-heads position on a print medium, **characterized** in that it comprises for a print out sweep with said array:

means for determining the x and y coordinates for at least one distal end (76, 78) of at least one row (70) of printing means in said print head array (60), and the angle of rotation of said row (70) with reference to a base line, made up of coordinates for the long side of an image stored to be printed, whereby every dot of a part of an image to be printed having determinable corresponding x and y coordinates related to a determined position for said row (70);

means for determining an x and y coordinate for a first tangent (80, 82) of said row (70) with the first part of said image to be printed, and at least one second tangent (84) for said image in relation to a mathematically defined configuration (72, 74) relating to the rotation angle of the row and said distal end (76, 78), said second tangent making up a boundary for when a print out of said part image should take place;

means for determining if said row (70) during movement is closing in to said second tangent (84) from the clockwise or counter clockwise direction;

means for providing a print out decision for a subsequent part image to be printed through said print-head (60) in front of a print out, if the row (70) is closing in clockwise to the second tangent (84) when using the upper distal end (76) of the row (70) as reference for the second tangent (84), and the vice versa when using the lower distal end (78) as reference for a sweep.

2. An assembly according to claim 1, wherein the print-head (60) is of the ink-jet type with spray nozzles (12) making up said row (70).

3. An assembly according to claim 2, wherein the first and last nozzle in said row are references for said distal ends.

4. An assembly according to claims 1-3, wherein said mathematical configuration has one origin on at least one of the distal ends of said row.

5. An assembly according to claims 1-4, wherein said configuration is used for clockwise rotation and/or counter clockwise rotational print out feeding through said row.

6. An assembly according to claims 1-5, wherein said mathematical configuration is a line suitable for forward feeding of said array.

5 7. An assembly according to claims 1-5, wherein said mathematical configuration is a curve suitable for rotation feeding of said array.

8. An assembly according to claims 1-7, wherein a frame is related to each part image to be printed, thus defining every part image through at most four tangent coordinates for a first and a second tangent.

10 9. An assembly according to claim 8, wherein coordinates for a frame are stored in a table sorted in accordance with corresponding part images to be printed.

10. An assembly according to claim 8 or 9, wherein said frame is longer then the actual part image to be printed, whereby a next image to be printed is pre checked according to its alignment for printing.

15 11. An assembly according to claims 1-9, wherein said array row is approximated with at least one half of a rectangle, thus facilitating the finding of a tangent for said row for a part image to be printed.

20 12. A method for a sensor and print-head (2) assembly comprised in a housing (1) for a handheld and hand operated printing device controlled by a processor (4), comprising at least one sensor means (S0, S1) for keeping track of the assemblies and print-heads position on a print medium and a print-head array (60) **characterized** in that it comprises, during a print out sweep with said array, the steps of:

- determining the position of the array at each moment;
- predicting the positions of the array for subsequent moments in order to
- 25 - determine whether a text block or an image is about to be printed during said subsequent moments and if so
- deciding whether the complete text block or image, or a predefined part of the text block or the image will be covered by said array during said print out sweep, based on said predictions, and if not,
- 30 - omitting a print out of said text block or image, or said part of the text block or image during said print out sweep, otherwise
- printing out said text block or image during said print out sweep.

13. A method for a sensor and print-head (2) assembly comprised in a housing (1) for a hand-held and hand-operated printing device controlled by a processor (4), comprising at least one sensor means (S0, S1), a print-head array (60), input means (6) on said housing (1) connected to said processor (4) for input of assembly control commands, and means for keeping track of the assemblies and print-heads position on a print medium, **characterized** in that it comprises, during a print out sweep with said array, the steps of:

determining the x and y coordinates for at least one distal end (76, 78) of at least one row (70) of printing means in said print head array (60), and the angle of rotation of said row (70) with reference to a base line, made up of coordinates for the long side of an image stored to be printed, whereby every dot of a part of an image to be printed having determinable corresponding x and y coordinates related to a determined position for said row (70);

determining an x and y coordinate for a first tangent (80, 82) of said row (70) with the first part of said image to be printed, and at least one second tangent (84) for said image in relation to a mathematically defined configuration (72, 74) relating to the rotation angle of the row and said distal end (76, 78), said second tangent making up a boundary for when a print out of said part image should take place;

determining if said row (70) during movement is closing in to said second tangent (84) from the clockwise or counter clockwise direction; and

providing a print out decision for a subsequent part image to be printed through said print-head (60) in front of a print out, if the row (70) is closing in clockwise to the second tangent (84) when using the upper distal end (76) of the row (70) as reference for the second tangent (84), and the vice versa when using the lower distal end (78) as reference for a sweep.

14. A method according to claim 13, wherein the print-head is of the ink-jet type with spray nozzles making up said row.

15. A method according to claim 14, wherein the first and last nozzle in said row are references for said distal ends.

16. A method according to claims 13-15, wherein said mathematical configuration has one origin on at least one of the distal ends of said row.

17. A method according to claims 13-16, wherein said configuration is used for clockwise rotation and/or counter clockwise rotational print out feeding through said row.

18. A method according to claims 13-17, wherein said mathematical configuration is a line suitable for forward feeding with less rotation of said array.

19. A method according to claims 13-17, wherein said mathematical configuration is a curve suitable for rotation feeding of said array.

5 20. A method according to claims 13-19, wherein a frame is related to each part image to be printed, thus defining every part image through at most four tangent coordinates for a first and a second tangent.

21. A method according to claim 20, wherein coordinates for a frame are stored in a table sorted in accordance with corresponding part images to be printed.

10 22. A method according to claim 20 or 21, wherein said frame is longer then the actual part image to be printed, whereby a next image to be printed is pre checked according to its alignment for printing.

23. A method according to claims 13-22, wherein said array row is approximated with at least one half of a rectangle, thus facilitating the finding of a tangent for
15 said row for a part image to be printed.

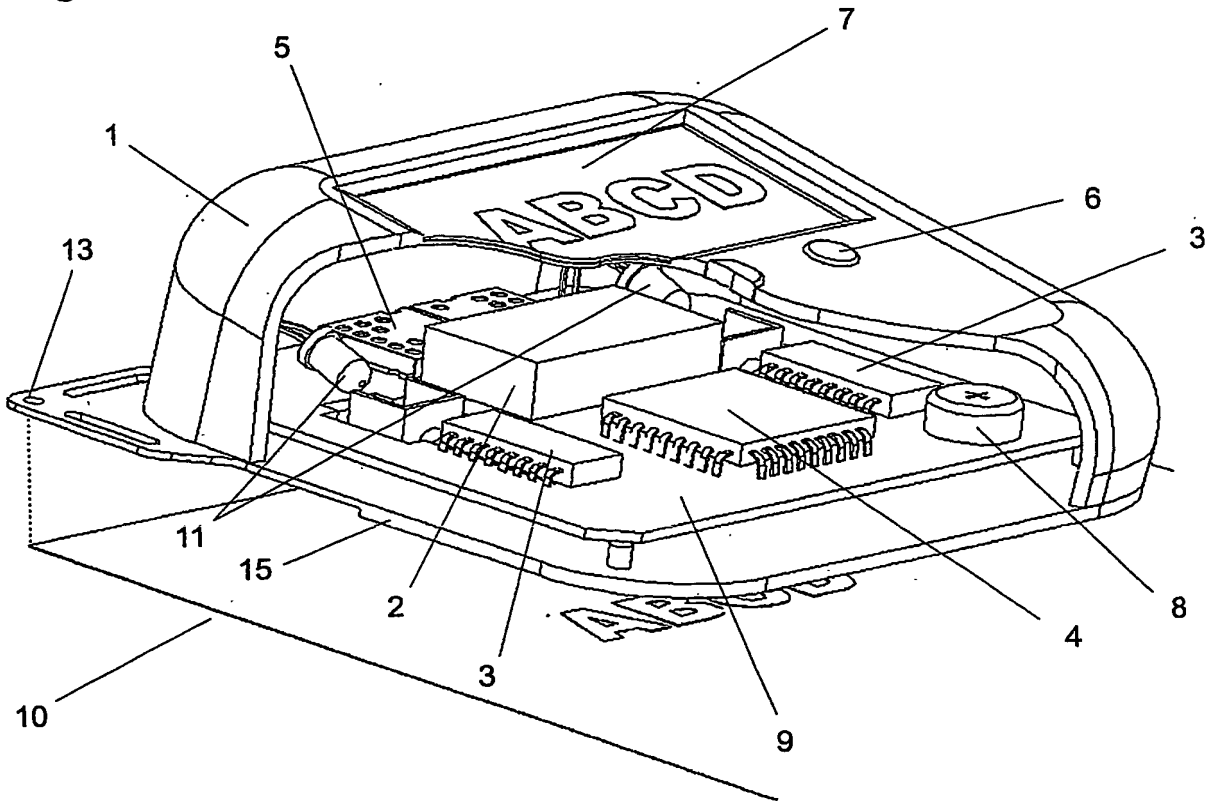
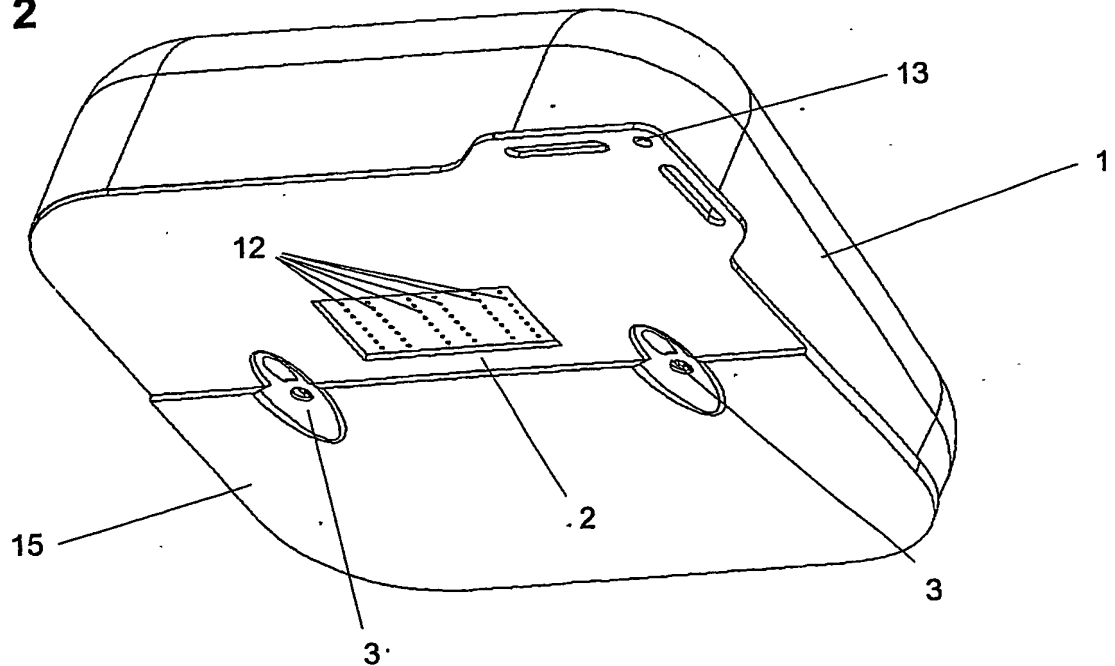
Fig. 1**Fig. 2**

Fig. 3

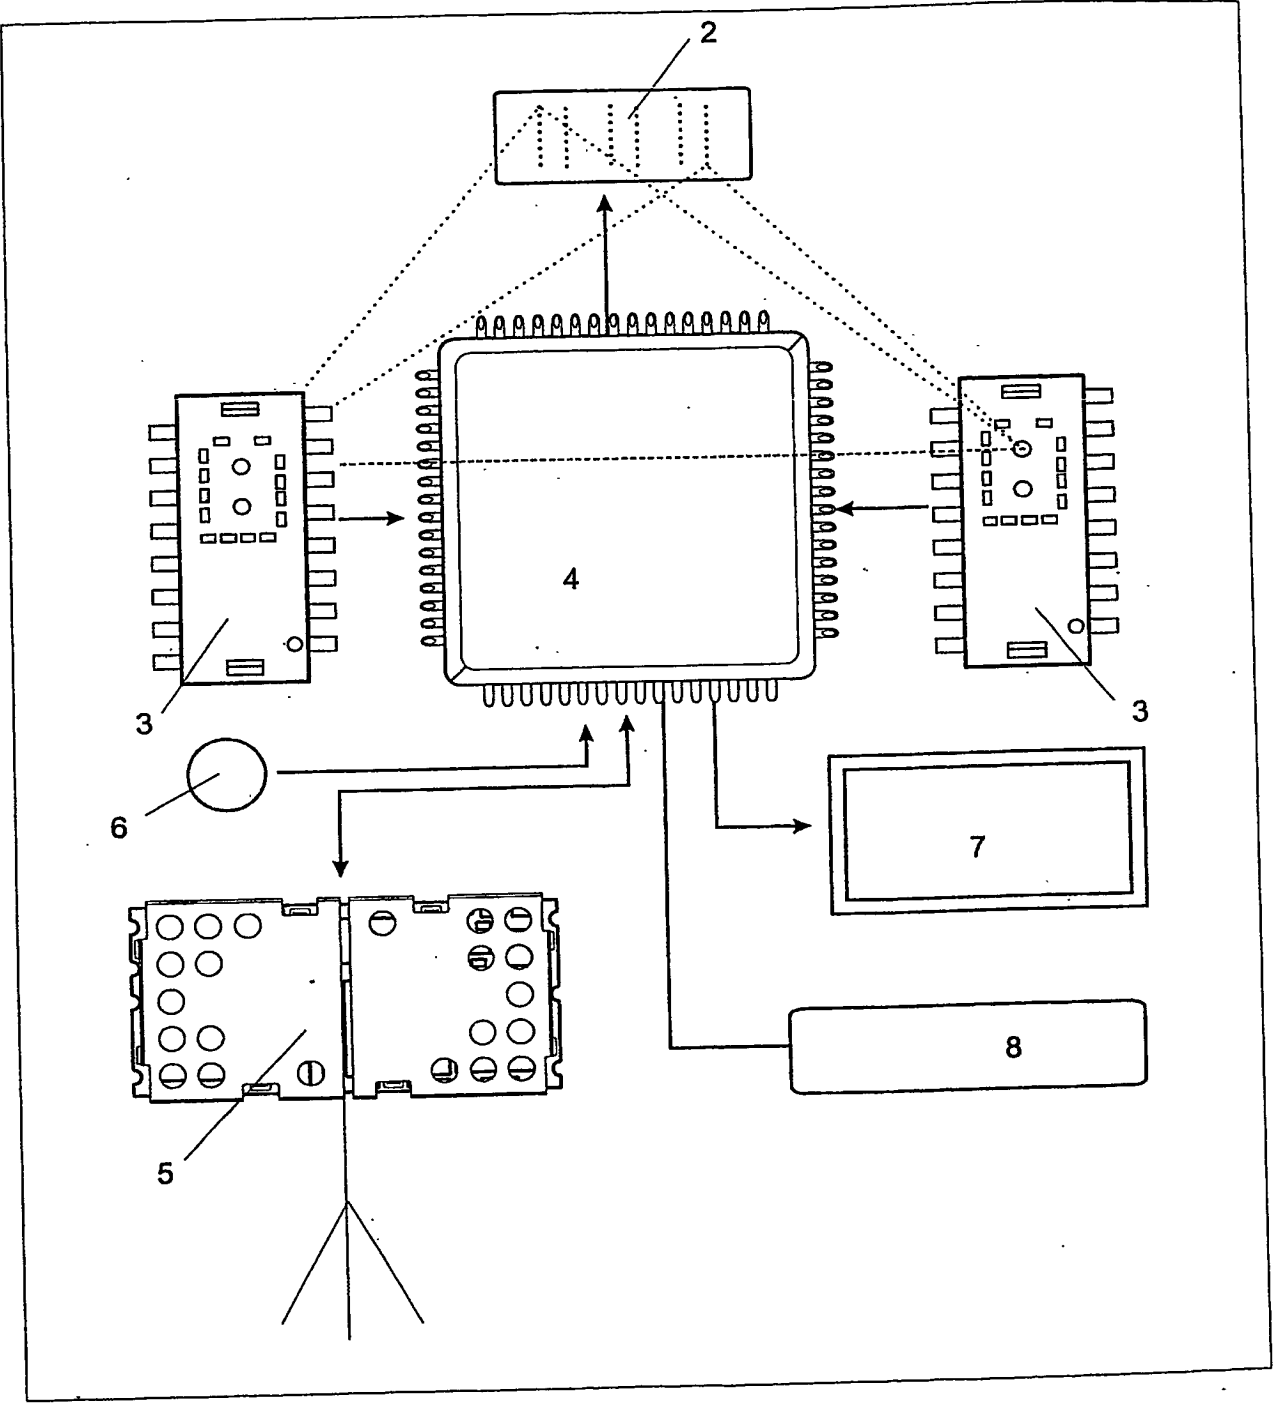


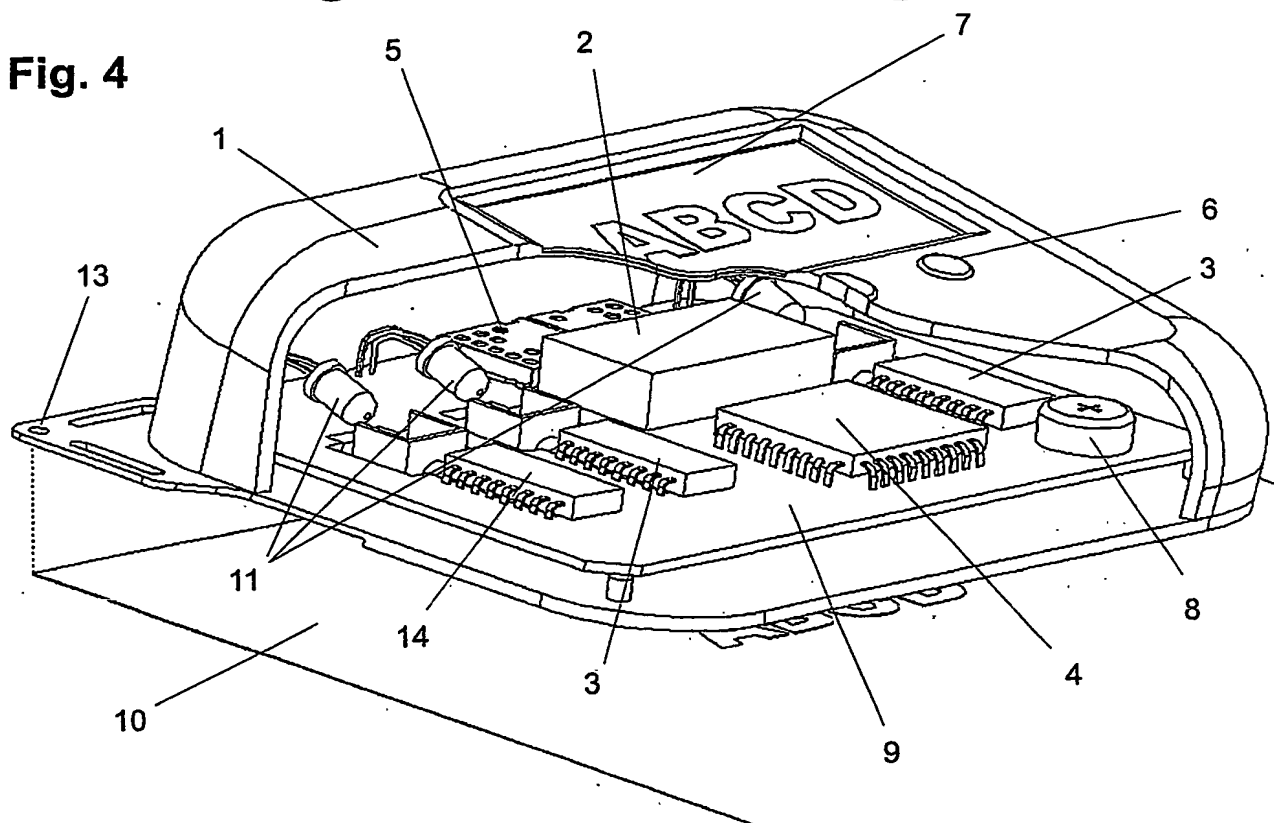
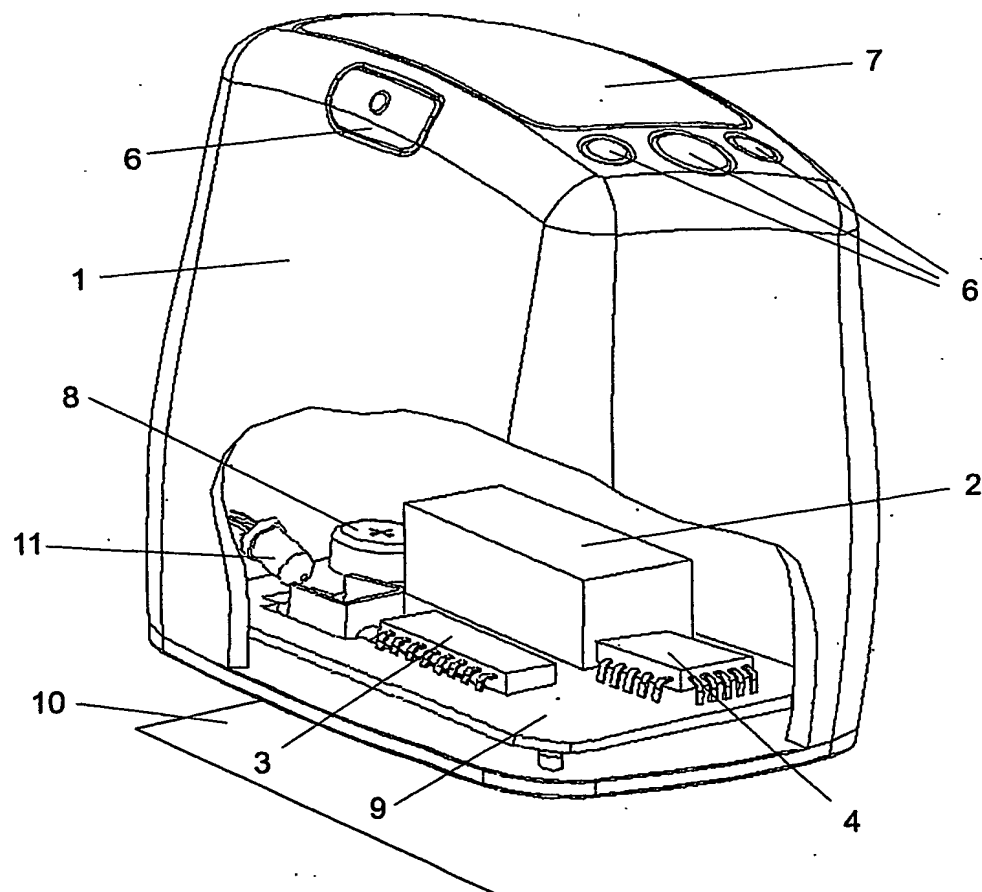
Fig. 4**Fig. 5**

Fig. 6

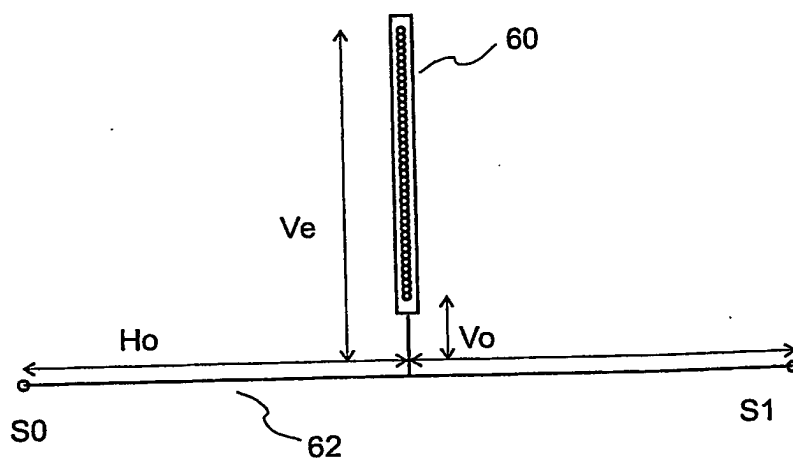


Fig. 7

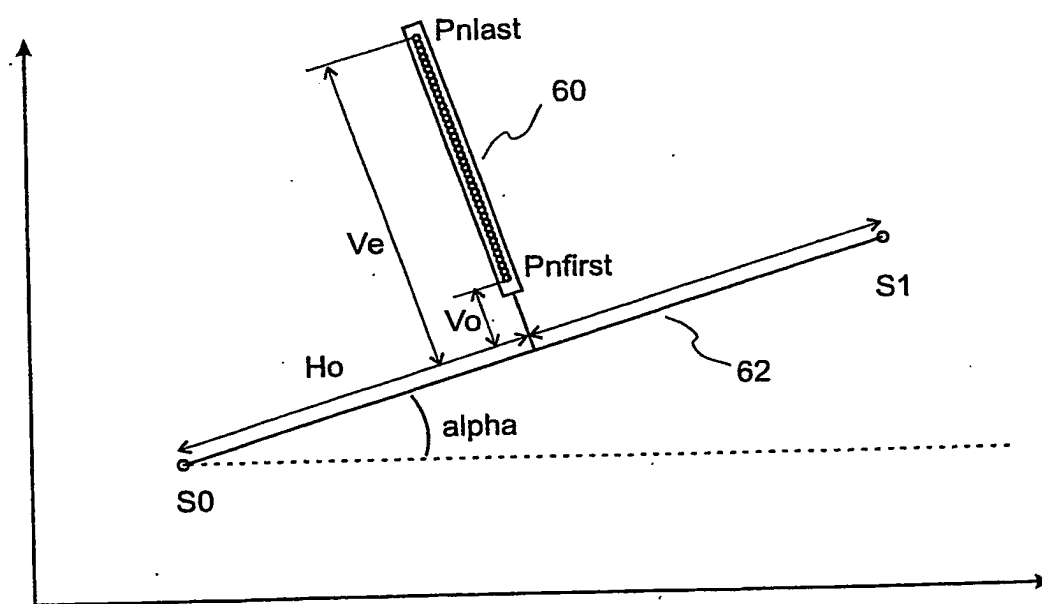


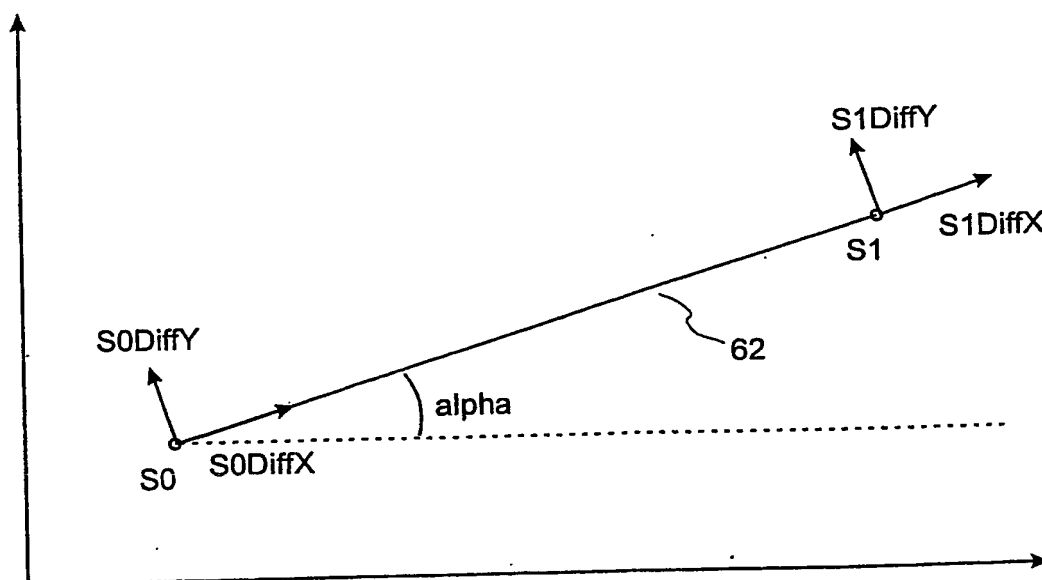
Fig. 8**Fig. 9**

Fig. 10

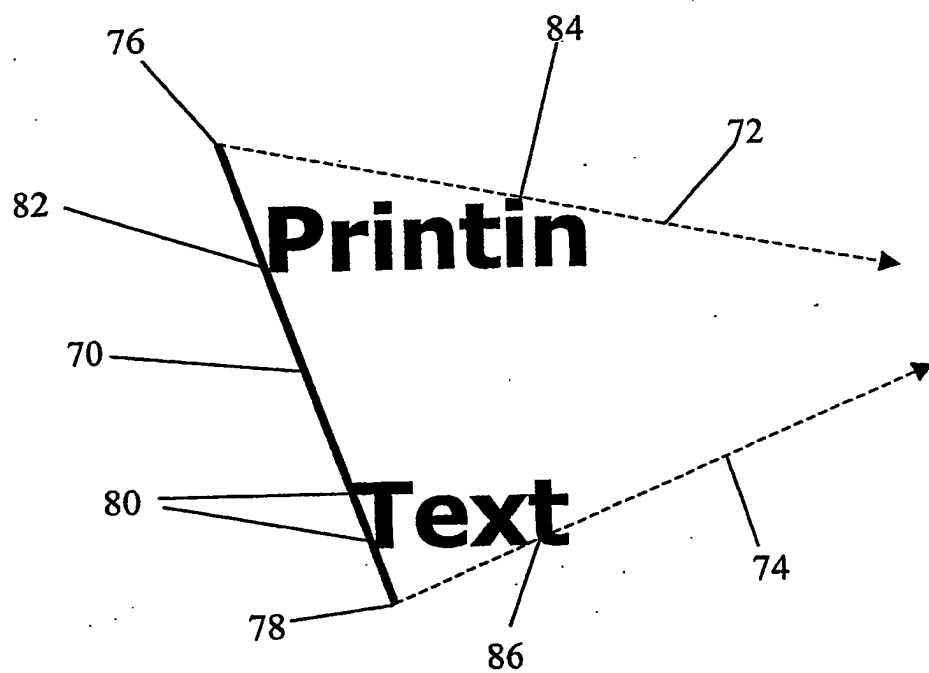
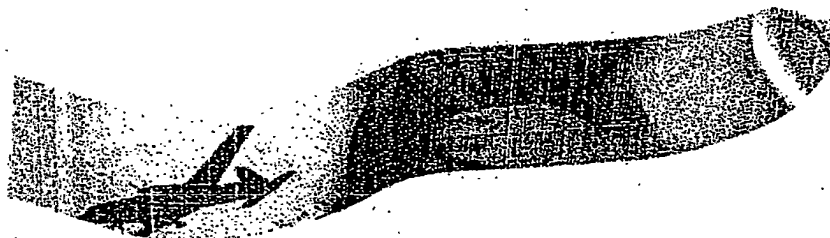


Fig. 11

90

Example of text to print

Fig. 12

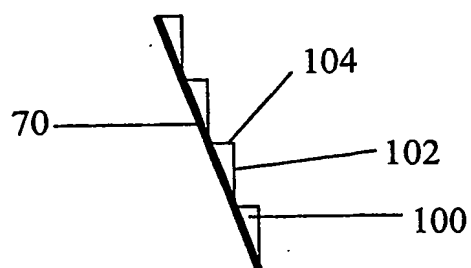


Fig. 13

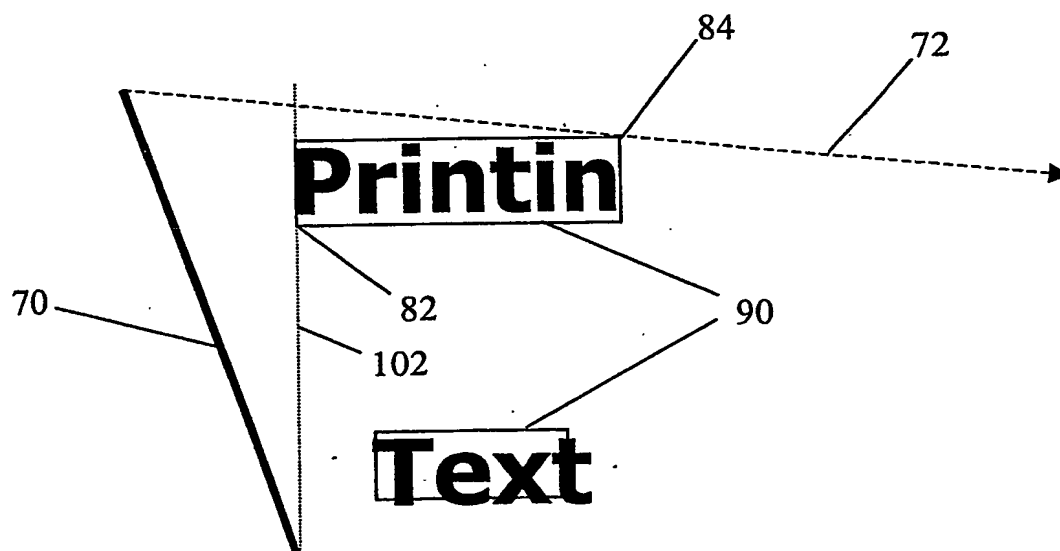


Fig. 14

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/SE 03/00391

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B41J 3/36, B41J 3/28, G06K 11/08, G06K 11/18
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B41J, G06K, H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5927872 A (YAMADA, N.), 27 July 1999 (27.07.99), claim 1, abstract --	1-22
A	DE 19947427 A1 (PAUGSTADT, R.), 5 April 2001 (05.04.01), abstract --	1-22
A	US 5852434 A (SEKENDUR, O.F.), 22 December 1998 (22.12.98), column 2, line 40 - column 4, line 24 --	1-22
P,A	US 6357939 B1 (BARON, J.M.), 19 March 2002 (19.03.02), column 3, line 1 - column 4, line 19 --	1-22

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 June 2003

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Date of mailing of the international search report

06-06-2003

Authorized officer

Anders Edlund /LR
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT


International application No.

PCT/SE 03/00391

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 0174598 A1 (ANOTO AB), 11 October 2001 (11.10.01), claims 1-4, abstract -- -----	1-22

INTERNATIONAL SEARCH REPORT

Information on  family members

29/04/03

International application No.

PCT/SE 03/00391

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	5927872	A	27/07/99	JP	11058844 A	02/03/99
DE	19947427	A1	05/04/01	AU	1646001 A	10/05/01
				WO	0125019 A	12/04/01
US	5852434	A	22/12/98	AU	4529896 A	14/07/97
				US	5477012 A	19/12/95
				WO	9722959 A	26/06/97
US	6357939	B1	19/03/02	JP	2002307756 A	23/10/02
WO	0174598	A1	11/10/01	AU	4491001 A	15/10/01
				AU	5721100 A	09/01/01
				EP	1187956 A	20/03/02
				EP	1272351 A	08/01/03
				SE	0001245 A	06/10/01
				US	2002024542 A	28/02/02

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.